GENERAL INTRODUCTION

Thank you for purchasing this telephone that adopts the up-to-the-minute integrated circuit, with superior craftwork and stable capability. Please read the manual carefully for proper use.

SAFETY INSTRUCTION

When using your telephone, please follow these basic safety precautions to reduce the risk of fire, electric shock or injury to persons.

1. Read and understand all instructions.
2. Follow all warnings and instructions marked on the products.
3. Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
4. Do not use this product near water (for example, near a bath tub, kitchen sink or swimming pool).
5. Do not place this product on an unstable cart, stand, or table. The product may fall, causing serious damage to the product.
6. Never spill liquid of any kind on the product.
7. To reduce the risk of electric shock, do not disassemble this product. If service or repair work is required, contact your qualified technician.
8. Do not use the telephone to report a gas leak in the vicinity of the leak.

FUNCTIONS

- Pulse/Tone dialing
- Redial the last dialed number
- Mute function
- Pause and flash function
- Ringing volume HI/LO for selection
- Desk/wall mountable
- Incoming ringer LED indicator

LOCATION DESCRIPTION

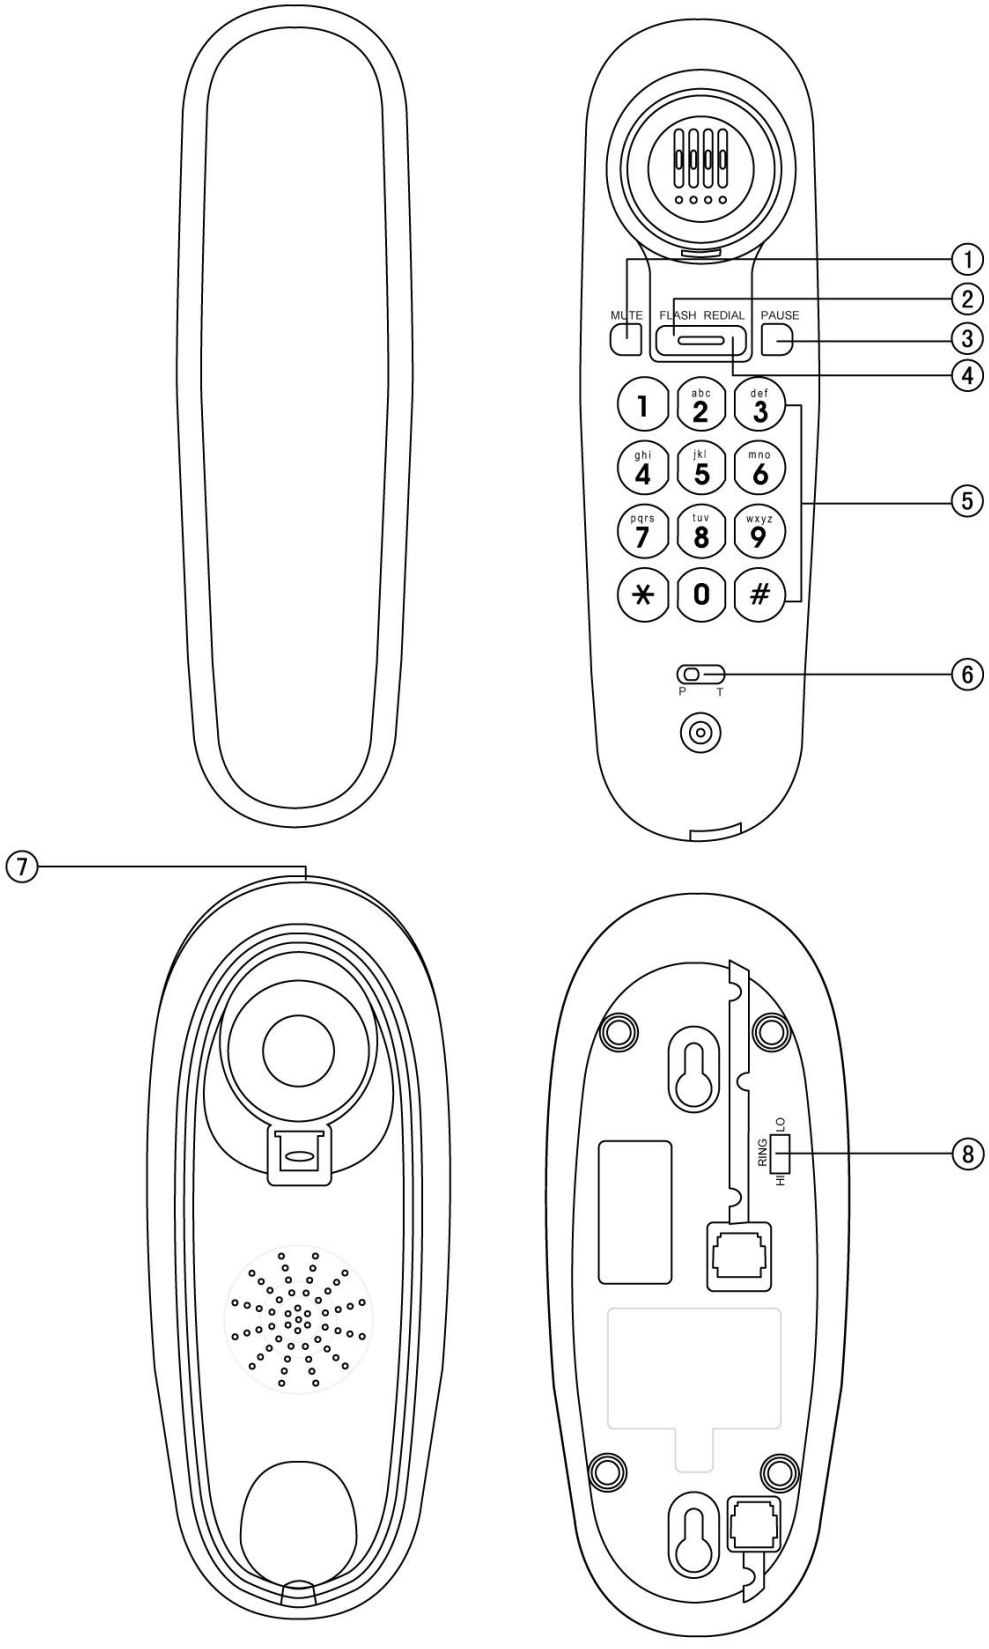

① MUTE
② FLASH
③ PAUSE
④ REDIAL
⑤ NUMERICAL KEY
⑥ P/T SWITCH
⑦ RING
⑧ RING(HI-LO)

OPERATION

1) Preparation

1.1 Connect the line plugs into phone line jack and the other plug to connect to the wall jack.

1.2 Insert the handset coil cord into the phone jack at the bottom.

1.3 Set the dial mode according to local network, while **T** refers to Tone dialing and **P** refers to pulse dialing.

2) Receiving

As it rings, pick up the handset from the cradle to answer, and put back the handset to hang up to end the conversation.

3) Dialing

Pick up the handset, dial the desired number as hearing the dialing tone, then if you hear the long tone like "do—do", the line has got through. If you hear the short tone like "do... do... do" busy tone, you could press the hook switch then press **REDIAL** to dial it out again after some time. You could repeat the above process till getting the line through.

4) Redial

Pick up the handset, press the **REDIAL** button, the unit will redial the last number automatically.

5) Pause

The key is used for inserting a 3.6s pause in the dialing process. If you want to dial out from the extension phone, press PABX code (normally "0" or "9") + **PAUSE** + desired number, then you could just press **FLASH** key and then press **REDIAL** to dial out again when the dialed number is busy.

6) Flash

The flash time is 100ms, flash function is available working in special PABX.

7) Pulse/Tone

Slide the mode switch to **T** for tone dialing while **P** for pulse dialing accordingly.

8) Mute

When making a phone call, if you need a temporal talk with someone else and you don't want the phone receiver hear your speaking, press and hold **MUTE** key to hold the line and keep the conversation at your side. And if you want to return to conversation, release the **MUTE** key.

9) Wall Mountable

The phone can be used for desktop, and it can also be used as wall-mounted.

Before mounting it on wall, pull out the handset backer near hook switch, and then insert it again in reverse. So the backer can hold and keep the handset not to drop down.

10) Ringing volume

There are two levels for the ringing volume control: **HI** & **LO** for selection. If you don't want to be disturbed by the incoming calls, slide the RING switch which is located at the bottom of the unit to **LO** position when the switch at the high level, the ringing sound will be cut down.

11) RINGER LED indicator

When there is a new ringing comes, the LED indicator located on the top of base will flash.

TROUBLESHOOTING

Trouble	Check	Solution
No voice	Whether the handset or transmission line breaks off or not.	Connect them properly or change the line.
Receiving available only	Whether dialing system is proper.	Reset the dialing mode (T/P).
Noise	a. Whether the circuit breaks off or the line is loose; b. Whether the connector box is moist or rusty.	a. Change the line; b. Change the connector box.
Ring only once, then break off but out-dialing is available	Whether the connection site is moist or extension too much.	